


Foret queue cylindrique extra-long DIN1869-2

Straight shank twist drill extra long series DIN1869-2

Spiralbohrer zylinderschaft extra lange Serie DIN1869-2

Broca mango cilíndrico serie extra larga DIN1869-2

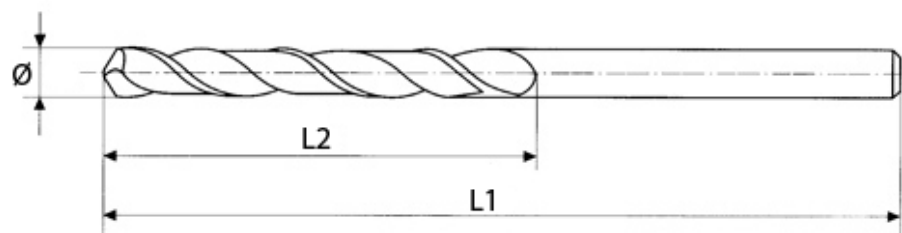

Référence / Code
10BISL2

DIN 1869-2

Ø mm	L1 mm	L2 mm
2	160	110
2,5	180	110
3	190	130
3,2	200	135
3,5	210	145
4	220	150
4,2	220	150
4,5	235	160
5	245	170
5,5	260	180
6	260	180
6,5	275	190
6,8	290	200
7,5	290	200

Ø mm	L1 mm	L2 mm
8	305	210
8,5	305	210
9	320	220
9,5	320	220
10	340	235
10,2	340	235
10,5	340	235
11	365	250
11,5	365	250
12	375	260
12,5	375	260
13	375	260
14	380	275

Nuance <i>Material</i>	HSS
Type	Meulé <i>Fully ground</i>
Aspect <i>Surface</i>	Blanc <i>White</i>
Hélice <i>Helix</i>	Normale
Goujure <i>Flute</i>	Normale
Angle pointe <i>Point angle</i>	118°
Affûtage <i>Point shapes</i>	Croix <i>Split point</i>

Unité de conditionnement : unitaire.
Unit packet : unitary.

Recommandé pour :
Suitable for :

- ◆ Acier / Steel
- ◆ Aluminium
- ◆ Fonte / Cast iron
- ◆ Bois / Wood